

Connecting to an External Monitor



Connecting to a projector (monitor)

Plug VGA (monitor cord) into computer and projector (or monitor)



Connecting to a SMART board

1. Plug VGA (monitor cord) into computer and SMART control box or projector



into



or



2. Plug USB cord into computer and dongle of SMART board



into




Connecting to an External Monitor


3 Ways to push image to external display
(choose 1)

1. 

Press the Windows + P button at same time

2. 

Press "Start" Choose "Connect to Projector"

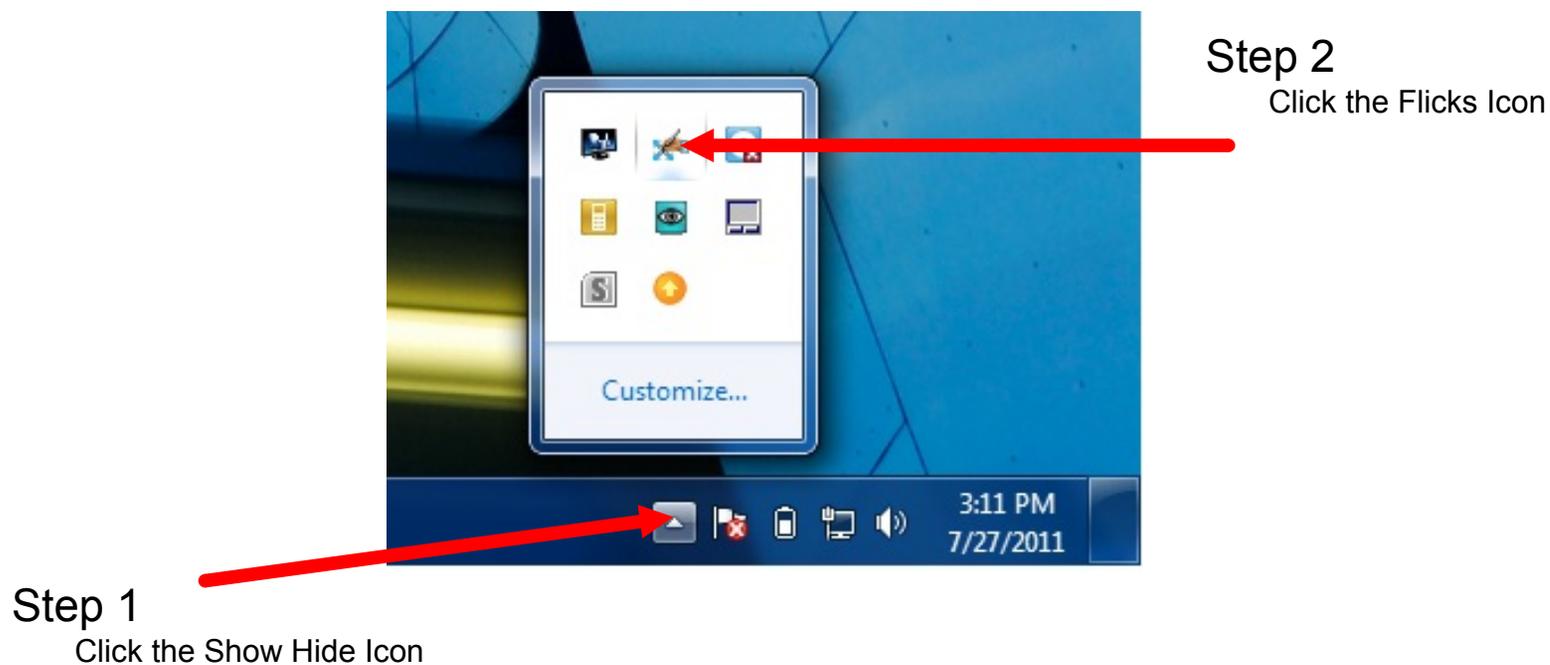
3. 

Press the Fn key + F8

Flicks Feature

Turning off Flicks is Important when you use a SMART board

Windows 7 Flicks Software turns your SMART Board into a Tablet and makes writing on the SMART board very difficult.



Flicks Feature

Click on
Customize your flick settings

Click on
Panning

Turn off the
Check Box for
Turn on Single Finger Panning

Click OK